


## NEW DLM PV 1000 V2 FM (900 345)


- Prewired combined lightning current and surge arrester for use in photovoltaic generator circuits
- High lightning current discharge capacity due to approved creepage discharge spark gap technology
- Maximum system availability due to spark gap technology with direct current extinction circuit



Figure without obligation

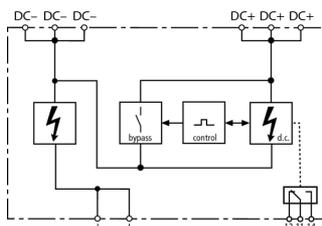

Basic circuit diagram DLM PV 1000 V2 FM

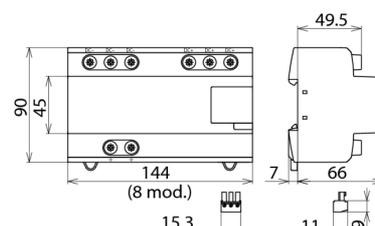

Dimension drawing DLM PV 1000 V2 FM

Combined lightning current and surge arrester for photovoltaic power supply systems up to 1000 V d.c.

| Type   | DLM PV 1000 V2 FM                                       |
|--|---|
| Part No.   | 900 345   |
| SPD classification according to EN 61643-11                                | Type 1  |
| SPD classification according to IEC 61643-1/-11                            | Class I   |
| Max. PV voltage ( $U_{CPV}$ ) of the PV generator                          | 1000 V  |
| Max. continuous operating d.c. voltage ( $U_{max DC}$ )                    | 1000 V  |
| Min. continuous operating d.c. voltage ( $U_{min DC}$ )                    | 100 V   |
| Follow current extinguishing capability d.c. ( $I_{ri DC}$ )               | 100 A   |
| Nominal discharge current ( $8/20 \mu s$ ) ( $I_n$ )                       | 25 kA   |
| Lightning impulse current ( $10/350 \mu s$ ) [DC+/DC- -> PE] ( $I_{imp}$ ) | 50 kA   |
| Specific energy [DC+/DC- -> PE] (W/R)                                      | 625.00 kJ/ohms  |
| Lightning impulse current ( $10/350 \mu s$ ) [DC+ -> DC-] ( $I_{imp}$ )    | 25 kA   |
| Specific energy [DC+ -> DC-] (W/R)   | 156.25 kJ/ohms  |
| Voltage protection level [DC+ -> DC-] ( $U_p$ )                            | $\leq 3.3$ kV   |
| Voltage protection level [(DC+/DC-) -> PE] ( $U_p$ )                       | $\leq 4$ kV   |
| Operating current ( $I_{IN dc}$ )  | $\leq 5$ mA   |
| Response time [DC+ -> DC-] ( $t_k$ )                                       | $\leq 20$ ns  |
| Protective conductor current ( $I_{PE}$ )                                  | $\leq 1 \mu A$  |
| Operating temperature range ( $T_U$ )                                      | -40°C...+60°C   |
| Operating state/fault indication   | green / red   |
| Number of ports  | 1   |
| Cross-sectional area (min.)  | 1.5 mm <sup>2</sup> solid/flexible                      |
| Cross-sectional area (max.)  | 35 mm <sup>2</sup> stranded/25 mm <sup>2</sup> flexible |
| For mounting on  | 35 mm DIN rails acc. to EN 60715                        |
| Enclosure material   | thermoplastic, red, UL 94 V-0                           |
| Place of installation  | indoor installation                                     |
| Degree of protection   | IP 20   |
| Capacity   | 8 module(s), DIN 43880                                  |
| Type of remote signalling contact  | changeover contact                                      |
| a.c. switching capacity  | 250 V/0.5 A   |
| d.c. switching capacity  | 250 V/0.1 A; 125 V/0.2 A; 75 V/0.5 A                    |
| Cross-sectional area for remote signalling terminals                       | max. 1.5 mm <sup>2</sup> solid/flexible                 |
| Weight   | 756 g   |
| Customs tariff number  | 85363030  |
| GTIN   | 4013364146631   |
| PU   | 1 pc(s)   |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.